

moveXX

smart electric tugs

EN



Technical datasheet

TT1000-T

M100



» move your work easier

TECHNICAL DATA TT1000-T M100




According to VDI 2198 in Metric units.

Characteristics	1.1	Manufacturer		Movexx International B.V.	
	1.2	Manufacturer's type designation		TT1000-T M100	
	1.3	Drive		Electric with LiFePo ₄ battery	
	1.4	Operator type		Tilting	
	1.5*	Rated capacity/rated load*	Q [t]	1	
	1.7**	Rated drawbar pull**	F [N]	345	
Wt	2.1	Weight incl. battery	kg	55	
	2.3	Axle loading, without load	front/rear	kg	-/67
Tyres/Chassis	3.1	Tyres	front/rear	Solid Rubber	
	3.3	Tyres size	rear	mm	250x84
	3.4	Auxiliary wheel size		mm	80x35
	3.5	Wheels, number (x = driven)	front/rear		-/x2
	3.6	Tread	front/rear	b ₁₀ /b ₁₁ [mm]	248/358
	Dimensions	4.9	Tiller height	min-max	h ₁₄ [mm]
4.12		Tow coupling height	min-max	h ₁₀ [mm]	120-260
4.19		Overall length		l ₁ [mm]	1117
4.21		Overall width		b ₁ [mm]	442
4.31		Ground clearance, auxiliary wheel		m ₁ [mm]	45
4.32		Ground clearance, center of wheel base		m ₂ [mm]	41
4.35		Turning radius		Wa [mm]	665
Performance	5.1	Travel speeds forwards	with/without load	km/h	4/4
	5.1.1	Travel speed backwards	with/without load	km/h	4/4
	5.5**	Max drawbar pull (S2 = 60 min)	with load	N	345
	5.6**	Max drawbar pull (S2 = 5 min)	with load	N	690
	5.8*	Maximum slope (5 min)	with/without load	%	0/15
	5.9	Acceleration	with/without load	s	7/6
	5.10	Service brake			Electromagnetic
Drive	6.1	Drive motor output (S2 = 60 min)		kW	0.3
	6.4	Battery voltage/nominal capacity		V/Ah	24/20
	6.5	Battery weight		kg	8.4
Other	8.1	Type of drive unit			DC
	10.7	Sound level at operator's ear		dB(A)	<65

* The maximum payload is affected by the type of slope, operating time and floor type. See the graphic below for an indication of the allowable slope to load ratio (depending on slope surface/wheel type/machine weight).

** The maximum drawbar load on the hook [N] is determined by the engine power of the machine but is affected by the type of wheels of the machine and of the towed trolley/load, the type of surface and the driveable weight of the machine.

*** All values in this table have a tolerance of +/- 5%.

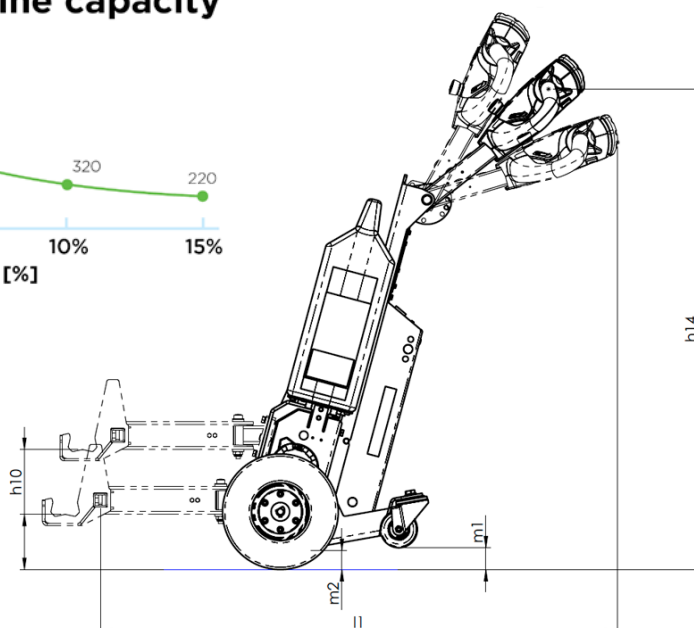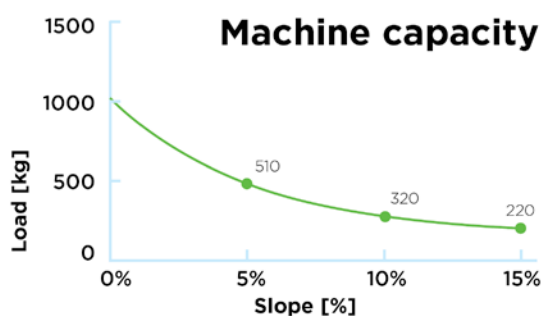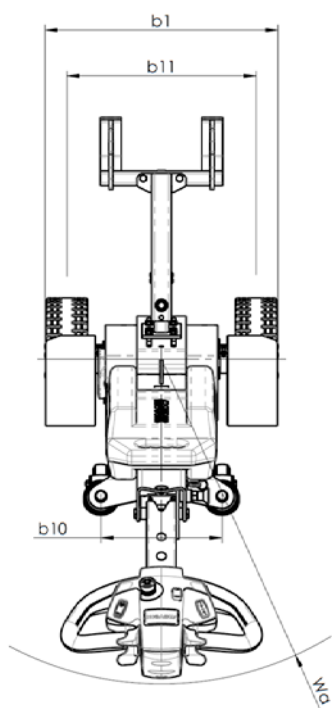

All Images of products shown in this datasheet are indicative only. The actual products may differ from the displayed image. No rights can therefore be derived from the images shown.

TECHNICAL DATA TT1000-T M100

According to VDI 2198 in Imperial units.

Characteristics	1.1	Manufacturer		Movexx International B.V.
	1.2	Manufacturer's type designation		TT1000-T M100
	1.3	Drive		Electric with LiFePo ₄ battery
	1.4	Operator type		Tilting
	1.5*	Rated capacity/rated load	Q [tn(US)]	1
	1.7**	Rated drawbar pull	F [lbf]	78
Wt	2.1	Weight incl. battery	lb	121
	2.3	Axle loading, with load	front/rear	lb -/148
Tyres/Chassis	3.1	Tyres	front/rear	Solid Rubber
	3.3	Tyres size	rear	in 9.8x3.3
	3.4	Auxiliary wheel size		in 3.2x1.4
	3.5	Wheels, number (x = driven)	front/rear	-/x2
	3.6	Tread	front/rear	b ₁₀ /b ₁₁ [in] 9.5/14
	Dimensions	4.9	Tiller height	min-max
4.12		Tow coupling height	min-max	h ₁₀ [in] 4.5-10.5
4.19		Overall length		l ₁ [in] 44
4.21		Overall width		b ₁ [in] 17.5
4.31		Ground clearance, auxiliary wheel		m ₁ [in] 1.8
4.32		Ground clearance, center of wheel base		m ₂ [in] 1.6
4.35		Turning radius		Wa [in] 26
Performance	5.1	Travel speeds forwards	with/without load	mph 2.5/2.5
	5.1.1	Travel speed backwards	with/without load	mph 2.5/2.5
	5.5**	Max drawbar pull (S2 = 60 min)	with load	lbf 78
	5.6**	Max drawbar pull (S2 = 5 min)	with load	lbf 155
	5.8*	Maximum slope (5 min)	with/without load	0/15
	5.9	Acceleration	with/without load	7/6
	5.10	Service brake		Electromagnetic
Drive	6.1	Drive motor output (S2 = 60 min)	hp	0.4
	6.4	Battery voltage/nominal capacity		24/20
	6.5	Battery weight +/- 5%	lb	18.5
Other	8.1	Type of drive unit		DC
	10.7	Sound level at operator's ear	dB(A)	<65

* The maximum payload is affected by the type of slope, operating time and floor type. See the graphic below for an indication of the allowable slope to load ratio (depending on slope surface/wheel type/machine weight).

** The maximum drawbar load on the hook [lbf] is determined by the engine power of the machine but is affected by the type of wheels of the machine and of the towed trolley/load, the type of surface and the driveable weight of the machine.

*** All values in this table have a tolerance of +/- 5%.

